PLASTIC PALLET · CLOSED-LOOP

TA-20

1,200 × 1,000 mm

Highest rack capacity in the line; withstands impacts and harsh conditions.




LENGTH (L)	WIDTH (W)	HEIGHT (H)
1,200 mm	1,000 mm	150 mm
47.24 in	39.37 in	5.90 in

Pallets per trailer 48 ft: 504 | 53 ft: 540

STATIC LOAD	DYNAMIC LOAD	RACK LOAD	WEIGHT BY VERSION
15,000 kg	1,700 kg	1,500 kg	25.8–26.5 kg
33,069 lb	3,748 lb	3,306 lb	Perforated · 25.8 Closed · 26.5

TECHNICAL DRAWING · MM

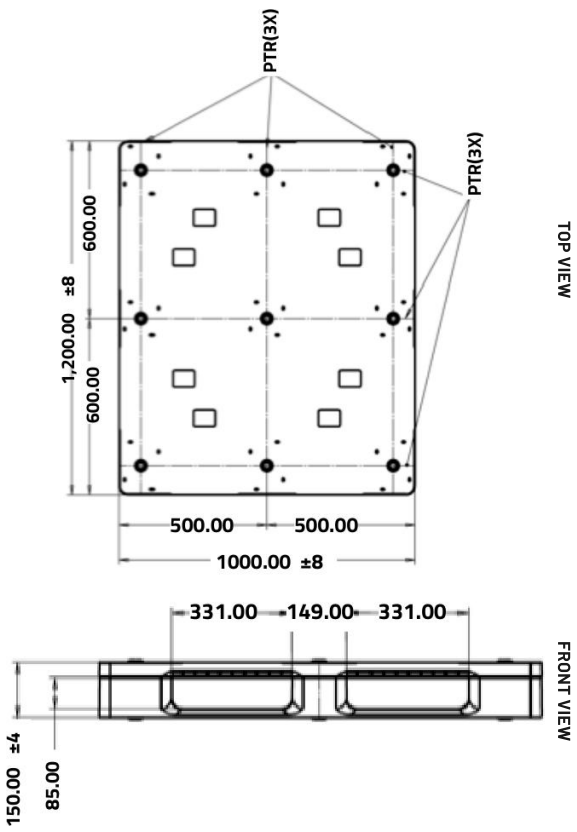

Features

- HDPE with recycled content; resistant to UV, oils and chemicals.
- Reinforced with 3 steel tubes (PTR) for racking; unreinforced version for floor use.
- Closed or perforated deck: the perforated deck drains and ventilates.
- Rackable and stackable in the reinforced versions.
- Compatible with hydraulic and electric pallet jacks and forklifts.
- Easy to clean, with no moisture absorption.

Options

- Closed or perforated
- With or without perimeter lip
- Unreinforced (TA-24, TA-25)
- RFID, color and marking