PLASTIC PALLET · CLOSED-LOOP

TA-200

1,200 × 1,000 mm

Reinforced clip system for automated systems and conveyors.



LENGTH (L)	WIDTH (W)	HEIGHT (H)
1,200 mm	1,000 mm	149 mm
47.24 in	39.37 in	5.90 in

Pallets per trailer 48 ft: 504 | 53 ft: 540

STATIC LOAD

8,500 kg

18,700 lb

DYNAMIC LOAD

1,700 kg

3,968 lb

SELECTIVE RACK

1,000 kg

2,200 lb


Drive-in · 900 kg

WEIGHT BY VERSION

21.48–28.3 kg

Perimeter base · 24.55
Runners · 21.48
Double-sided · 28.30

TECHNICAL DRAWING · MM

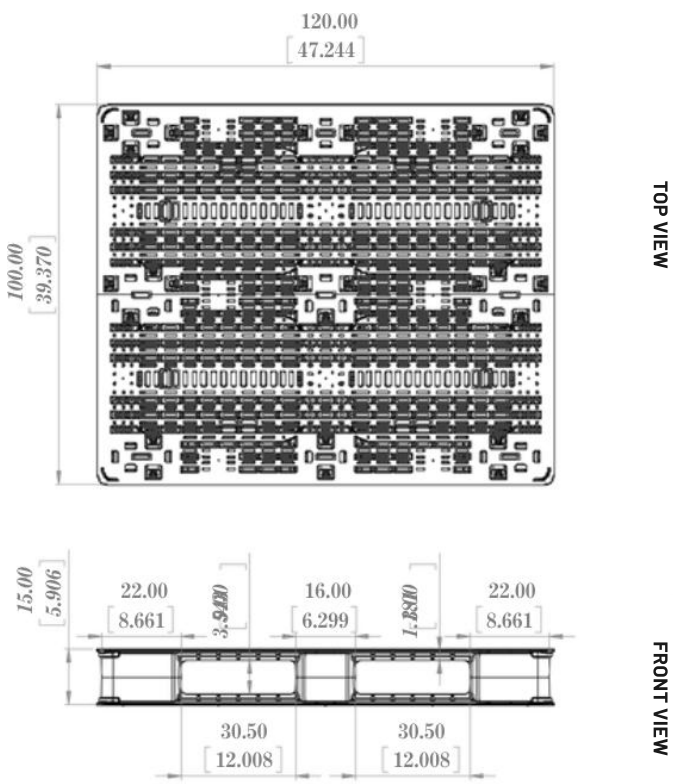

Features

- High-impact copolymer resin, UV resistant.
- Reinforced clip system, in perforated or reinforced versions.
- Suitable for selective and drive-in racking. Stackable.
- Compatible with roller and chain conveyors and automated systems.
- Forklift, hydraulic and electric pallet jack; double-sided version is forklift only.
- Same capacities in every configuration.

Options

- 1,000 × 1,200 mm or 40" × 48"
- Perimeter base, runners or double-sided
- Perforated or reinforced
- RFID and marking