PERFORATED, PERIMETER BASE · LIGHTWEIGHT AND EXPORT

TA-32

1,210 × 1,010 mm

Perforated with perimeter base: protects goods and allows double stacking.




LENGTH (L)	WIDTH (W)	HEIGHT (H)
1,210 mm	1,010 mm	146 mm
47.83 in	39.76 in	5.75 in

Pallets per trailer 48 ft: 504 | 53 ft: 540

STATIC LOAD	DYNAMIC LOAD	RACK LOAD	WEIGHT
1,800 kg	1,300 kg	N/A	10.65 kg
3,968 lb	2,866 lb	Not rackable	23.48 lb

TECHNICAL DRAWING · MM

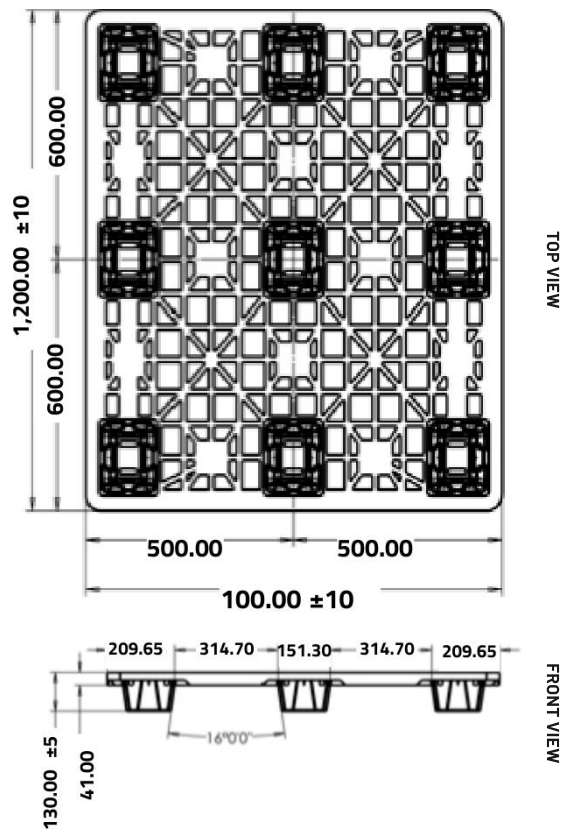

Features

- High-density polyethylene (HDPE) with recycled content; resistant to impact, UV rays and moisture.
- Bottom perimeter base: ready for double-stacked shipments.
- Perforated or closed deck.
- 4-way entry with electric pallet jack and forklift.
- As a plastic pallet, it does not require NOM-144 or ISPM 15 treatment.
- Not rackable.

Options

- Perforated or closed
- With or without lip
- With or without runners
- Range of colors